

Hydra: Computer Vision for Data Quality Monitoring

Thomas Britton,¹ Torri Jeske, David Lawrence, Kishansingh Rajput

*Thomas Jefferson National Accelerator Facility,
Newport News, VA, USA*

E-mail: tbritton@jlab.org

ABSTRACT: Hydra is a system which utilizes computer vision to perform near real time data quality management, initially developed for Hall-D in 2019. Since then, it has been deployed across all experimental halls at Jefferson Lab, with the CLAS12 collaboration in Hall-B being the first outside of GlueX to fully utilize Hydra. The system comprises back end processes that manage the models, their inferences, and the data flow. The front-end components, accessible via web pages, allow detector experts and shift crews to view and interact with the system. This talk will give an overview of the Hydra system as well as highlight significant developments in Hydra's feature set, acute challenges with operating Hydra in all halls, and lessons learned along the way.

Collective excitations and low-energy ionization signatures of relativistic particles in silicon detectors

Rouven Essig,^a Ryan Plestid,^b Aman Singal^{a,c}

^a*C. N. Yang Institute for Theoretical Physics, Stony Brook University, Stony Brook, NY 11794, USA*

^b*Walter Burke Institute for Theoretical Physics, California Institute of Technology, Pasadena, CA 91125*

^c*Institute for Advanced Computational Sciences, Stony Brook University, Stony Brook, NY 11794, USA*

E-mail: rouven.essig@stonybrook.edu, rplestid@caltech.edu,
aman.singal@stonybrook.edu

ABSTRACT: Solid-state detectors with a low energy threshold have several applications, including in direct-detection searches of non-relativistic halo dark-matter particles with sub-GeV masses. Moreover, when searching for relativistic or quasi-relativistic beyond-the-Standard-Model particles (i.e., $v/c \gtrsim 0.01$) that have an enhanced cross section for small energy transfers, a comparatively small detector with a low energy threshold may have better sensitivity than a larger detector with a higher energy threshold. In this paper, we provide accurate calculations of the low-energy ionization spectrum from high-velocity particles scattering in a dielectric material. We focus on silicon, although our results can be easily applied to other materials. We consider the full material response, in particular also the excitation of bulk plasmons. We generalize the energy-loss function to relativistic kinematics, and benchmark existing tools used for halo dark-matter scattering against publicly available electron energy-loss spectroscopy data. Compared to calculations of energy loss that are commonly used in the literature, such as the Photo-Absorption-Ionization model or the free-electron model, the inclusion of collective effects shifts the recoil ionization spectrum towards higher energies, typically peaking around 4–6 electron-hole pairs. We apply our results to the three benchmark examples: millicharged particles produced in a beam, neutrinos with a magnetic dipole moment produced in a reactor, and dark-matter particles that are upscattered by cosmic rays or in the Sun. Our results show that the proper inclusion of collective effects typically enhances a detector’s sensitivity to these particles, since detector backgrounds, such as dark counts, peak at lower energies.

PREPARED FOR SUBMISSION TO JINST

AI4EIC 2023 ANNUAL WORKSHOP
CATHOLIC UNIVERSITY OF AMERICA, WASHINGTON D.C.

Performance optimization for a scintillating glass electromagnetic calorimeter at the EIC

J. Crafts^b R. Fatemi^a T. Horn^b D. Kalinkin,^{a,1}

^a*Department of Physics & Astronomy, University of Kentucky,
177 Chem.-Phys. Building, 506 Library Drive, Lexington, 40506-0055, KY, USA*

^b*Physics Department, American Christian University,
620 Michigan Ave., N.E. Washington, 20064, DC, USA*

E-mail: dkalinkin@uky.edu

ABSTRACT: The successful realization of the EIC scientific program requires the design and construction of high-performance particle detectors. Recent developments in the field of scientific computing and increased availability of high performance computing resources have made it possible to perform optimization of multi-parameter designs, even when the latter require longer computational times (for example simulations of particle interactions with matter). Procedures involving machine-assisted techniques used to inform the design decision have seen a considerable growth in popularity among the EIC detector community. Having already been realized for tracking and RICH PID detectors, it has a potential application in calorimetry designs. A SciGlass barrel calorimeter originally designed for EIC Detector-1 has a semi-projective geometry that allows for non-trivial performance gains, but also poses special challenges in the way of effective exploration of the design space while satisfying the available space and the cell dimension constraints together with the full detector acceptance requirement. This talk will cover specific approaches taken to perform this detector design optimization.

KEYWORDS: Analysis and statistical methods, Calorimeters, Particle detectors, Performance of High Energy Physics Detectors

¹Corresponding author.

Considerations on the time resolution of single pixel irradiated 3D devices up to 10^{17} n_{eq}/cm^2 at 120 GeV SPS pion beams

Evangelos-Leonidas Gkougkousis^(a), Edgar Lemos Cid^(b), Viktor Coco^(b)

^(a) University of Zurich

^(b) European Organization for Nuclear Research (CERN), Geneva, Switzerland

^(c) Vienna University of Technology, Vienna, Austria

Abstract

The proven radiation hardness of silicon 3D devices up to fluences of 1×10^{17} n_{eq}/cm^2 makes them an excellent choice for next generation trackers, providing < 10 μm position resolution at a high multiplicity environment. The anticipated pile-up increase at HL-LHC conditions and beyond, requires the addition of < 50 ps per hit timing information to successfully resolve displaced and primary vertices. In this study, the timing performance, uniformity and efficiency of neutron and proton irradiated single pixel 3D devices is discussed. Fluences up to 1×10^{17} n_{eq}/cm^2 in three different geometrical implementations are evaluated using 120 GeV SPS pion beams. A MIMOSA-26 type telescope is used to provide detailed tracking information with a ~ 5 μm position resolution. Productions with single- and double-sided processes, yielding active thicknesses of 130 and 230 μm respectively, are examined with varied pixel sizes from 55×55 μm^2 to 25×100 μm^2 and a comparative study of field uniformity is presented with respect to electrode geometry. The question of electronics bandwidth is extensively addressed with respect to achievable time resolution, efficiency and collected charge, forming a 3D phase space to which an appropriate operating point can be selected depending on the application requirements.

Keywords: 3D sensors; Radiation Hardness; Silicon Detectors; Bandwidth; Test Beam; Fast Timing; Readout Electronics

1. Introduction

Over the past decade, 3D pixel sensors have emerged as tracking devices in high-energy physics experiments, within environments of intense radiation fluxes, encountered in the $|\eta| < 2$ regions of ATLAS Insertable B-Layer [1] and ATLAS Forward Proton (AFP) detector [2]. The sensor design, decoupling charge-generating volume from the drift distance, accommodates shorter electrode spacing, consequently decreasing the charge carrier trapping probability. Recent studies using the Transient Current Technique (TCT) [3, 4], have further substantiated the exceptional timing performance of such devices. For vertically incident events, the orthogonal relationship between drift direction and particle trajectory results in an absence of Landau fluctuations, key factor in extending theoretical timing performance of such devices, primarily constrained only by the signal's drift time.

This excellent performance is nevertheless impacted by field non-uniformities, intrinsic to the column geometry of the collection electrodes. The resulting radially expanding field within the pixel volume increases signal time-jitter, degrading

time resolution. Such a geometry, though detrimental under normal operation, can lead to high field densities near the collection electrode (> 30 V/ μm) at higher bias voltages (> 500 V) typically used after irradiation. In this operating mode, impact ionization and charge multiplication occur near the collection electrode in a similar way as in Multi-Wire Proportional Chambers (MWPCs) and can compensate for trapping induced charge collection efficiency issues.

In this study, three different geometries are examined after proton and neutron irradiation, using 120 GeV SPS pion beams [5]. Pixel sizes of 55×55 μm^2 [6], 25×100 μm^2 and 50×50 μm^2 [7] in substrates of 230 μm (190 μm active depth) for the first geometry and 150 μm (130 μm active depth) for the second and third, are tested to establish the minimum active thickness and pixel size still yielding sufficient charge and low enough jitter to achieve a 30 ps time resolution. Questions of signal integrity, bandwidth and efficiency are treated.

2. Timing and Signal Integrity

Studies under a ^{90}Sr source of the 50×50 μm variety single pixel structure (Figure 1 top), yield collected charge of 1.73 ± 0.02 fq (10,830 e^-), in agreement with the theoretically predicted value of ~ 82 $e/\mu m$ for a MIP in fully depleted Si [8] at a bias voltage of 20 V at -20 $^\circ C$. Signals are characterized by a fast rise time (10 % - 90 %) of 175 ± 4 ps, but present a tail at the slower end, characteristic of field non-uniformities. Although charge per micrometer in the 3D device is reduced by a factor of 60 with respect to a typical LGAD¹ (34.3 ± 0.4 fq for 50 μm thick HPK² device), an almost factor of 6 gain in rise time is noted (980 ± 1.4 ps for LGADs - Figure 1 bottom).

Analog time resolution of the LGAD-3D system can be approximated as the sum of a Landau fluctuations term, field related distortion effects and the noise-induced jitter [9]. Through a Constant Fraction Discriminator (CFD) time walk correction approach, a 2D time resolution map is established with respect to the CFD of each of the components (Figure 2). For LGADs, selecting higher CFDs to profit from increased

¹ Low Gain Avalanche Diode.

² Hamamatsu Photonics LTd.

Classical and Bayesian statistical methods for low-level metrology

Table des Matières

ILLUSTRATIONS	4
1. INTRODUCTION	6
2. PRESENTATION OF THE PROBLEM.....	7
3. CLASSICAL FREQUENTIST APPROACH IN THE CASE OF HOMOSCEDASTIC GAUSSIAN.....	8
3.1. Statistical distribution of the variable N in the case of a signal and a noise that are both Gaussian.....	9
3.2. Decision thresholds	9
3.2.1. Definition.....	9
3.2.2. Currie approach.....	9
3.3. Detection limit.....	10
3.4. Confidence intervals and hypothesis testing.....	12
3.5. Relation between bounds of the confidence interval and decision threshold.....	14
4. BAYESIAN APPROACH FOR HOMOSCEDASTIC GAUSSIANS.....	16
4.1. Introduction to Bayesian methods	16
4.1.1. Choosing a prior	18
4.2. Presentation of the problem	18
4.3. Credibility interval and hypothesis testing.....	19
4.3.1. Decision threshold.....	20
4.3.2. Detection limit.....	21
5. SYNTHESIS.....	21
5.1. Frequentist point of view	21
5.1.1. Calculation of the decision threshold and detection limit	21
5.1.2. Comparison with confidence interval	23
5.2. Bayesian point of view.....	23
5.3. Verification by simulation	24
5.4. Conclusions on the homoscedastic case.....	24

Nonperturbative Collins-Soper Kernel from Chiral Quarks with Physical Masses

Dennis Bollweg,¹ Xiang Gao,^{2,*} Swagato Mukherjee,¹ and Yong Zhao²

¹*Physics Department, Brookhaven National Laboratory, Upton, New York 11973, USA*

²*Physics Division, Argonne National Laboratory, Lemont, Illinois 60439, USA*

(Dated: March 4, 2024)

Abstract

We present a lattice QCD calculation of the rapidity anomalous dimension of quark transverse-momentum-dependent distributions, i.e., the Collins-Soper (CS) kernel, up to transverse separations of about 1 fm. This unitary lattice calculation is conducted, for the first time, employing the chiral-symmetry-preserving domain wall fermion discretization and physical values of light and strange quark masses. The CS kernel is extracted from the ratios of pion quasi-transverse-momentum-dependent wave functions (quasi-TMDWFs) at next-to-leading logarithmic perturbative accuracy. Also for the first time, we utilize the recently proposed Coulomb-gauge-fixed quasi-TMDWF correlator without a Wilson line. We observe significantly slower signal decay with increasing quark separations compared to the established gauge-invariant method with a staple-shaped Wilson line. This enables us to determine the CS kernel at large nonperturbative transverse separations and find its near-linear dependence on the latter. Our result is consistent with the recent lattice calculation using gauge-invariant quasi-TMDWFs, and agrees with various recent phenomenological parametrizations of experimental data.

* gaox@anl.gov

J/ψ -pair production at NLL in TMD factorisation at the LHC

Alice Colpani Serri,^{a,*} Jelle Bor,^{b,c} Daniël Boer^b and Jean-Philippe Lansberg^c

^aFaculty of Physics, Warsaw University of Technology,
plac Politechniki 1, 00-661, Warszawa, Poland

^bVan Swinderen Institute for Particle Physics and Gravity, University of Groningen,
Nijenborgh 4, 9747 AG Groningen, The Netherlands

^cUniversité Paris-Saclay, CNRS, IJCLab,
rue Georges Clémenceau 15, 91405 Orsay, France

E-mail: alice.colpani_serri.dokt@pw.edu.pl, j.bor@rug.nl, d.boer@rug.nl,
jean-philippe.lansberg@in2p3.fr

J/ψ -pair production at the LHC is currently one of the few tools available to probe gluon transverse momentum distributions (TMDs). In this context, data from LHCb in the collider mode have the potential to probe the evolution of the unpolarised-gluon TMDs and to measure the distribution of the linearly-polarised gluon in unpolarised protons for the first time. In this proceedings contribution, improved predictions obtained for the LHC (at $\sqrt{s} = 13$ TeV) up to next-to-leading logarithm (NLL) in TMD factorisation are presented. We show the obtained predictions of transverse-momentum distributions at different invariant masses and rapidities computed in the LHCb acceptance along with PDF uncertainty. We predict the azimuthal modulations of the cross section that arise from linearly-polarised gluons.

The European Physical Society Conference on High Energy Physics (EPS-HEP2023)
21-25 August 2023
Hamburg, Germany

*Speaker

© Copyright owned by the author(s) under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License (CC BY-NC-ND 4.0).

<https://pos.sissa.it/>

J/ψ -pair production at NLL in TMD factorisation at the LHC

Alice Colpani Serri

1. Introduction

Inclusive J/ψ -pair production in proton-proton collisions represents a great tool to allow for extractions of the poorly known gluon Transverse Momentum Dependent Parton Distribution Functions (TMD-PDFs or TMDs) [1, 2]. Indeed, this process is mainly generated by gluon-gluon fusion and Color Singlet (CS) transitions are the main source of J/ψ pairs, for which TMD-factorisation-breaking effects are absent [3–5]. For this reason J/ψ -pair production is considered a great candidate for probing gluon TMDs at the LHC. Moreover, the invariant mass of the J/ψ -pair in the final state can be tuned with the individual momenta of the two J/ψ , allowing for the investigation of the scale evolution of the TMDs.

2. Overview of the process and formalism

The process considered in our study is the simultaneous production of two J/ψ in a single parton scattering from unpolarised proton-proton collisions. The J/ψ is relatively easy to produce and to detect, allowing for the collection of a large number of experimental data. From a theoretical point of view, though, it is still not clear how to treat quarkonium production: many models have been proposed in an attempt to describe quarkonium-production mechanisms. However, the consensus is that the *Colour-Singlet Model* (CSM) works for the particular case where a J/ψ -pair is generated [6].

A leading-order Feynman diagram of the process is shown in Figure 1. The protons have momentum P_1 and P_2 and the partons take a momentum fraction x_i from them (collinear contribution), besides having a transverse component k_{iT} . Considering the TMD factorisation [8], the non-perturbative gluon TMDs are defined through the hadron correlator $\Phi(x_i, k_{iT})$. For an

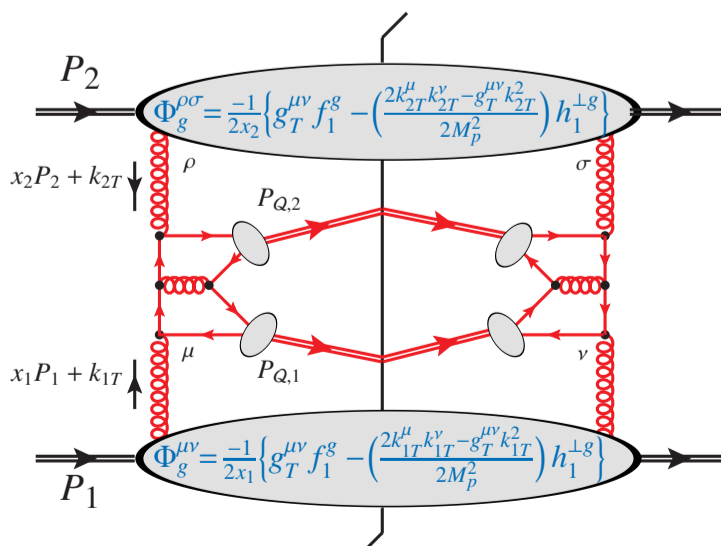


Figure 1: Schematic overview of the inclusive scattering for $p + p \rightarrow J/\psi + J/\psi$ in TMD factorisation. From [7].

A new Wolfenstein-like expansion of lepton flavor mixing towards understanding its fine structure

Zhi-zhong Xing^{1,2} *

¹Institute of High Energy Physics and School of Physical Sciences,
University of Chinese Academy of Sciences, Beijing 100049, China

²Center of High Energy Physics, Peking University, Beijing 100871, China

Abstract

Taking the tri-bimaximal flavor mixing pattern as a particular basis, we propose a new way to expand the 3×3 unitary Pontecorvo-Maki-Nakagawa-Sakata (PMNS) lepton flavor mixing matrix U in powers of the magnitude of its smallest element $\xi \equiv |U_{e3}| \simeq 0.149$. Such a Wolfenstein-like parametrization of U allows us to easily describe the salient features and fine structures of flavor mixing and CP violation, both in vacuum and in matter.

arXiv:2403.00559v1 [hep-ph] 1 Mar 2024

*E-mail: xingzz@ihep.ac.cn

Ground water retention correlation to atmospheric muon rates

T. Avgitas^a, J.-C. Ianigro^a, J. Marteau^a

^aUniv Lyon, Univ Claude Bernard Lyon 1, CNRS/IN2P3, IP2I Lyon, UMR 5822, , F-69622, Villeurbanne, France

Abstract

Muography is an investigation technique based on the detection of the atmospheric muon flux' modification through matter. It has found lately multiple applications in geosciences, archaeology, and non invasive industrial controls. Mostly known for its imaging capabilities, muography may be exploited as well for monitoring purposes since the atmospheric muon flux is available permanently. In this paper we present an interesting measurement performed in the context of an archaeological project called Archémuons, on the archaeological site of "Palais du Miroir" in Vienne, South of Lyon, France. We installed a muon detector in an underground gallery within the foundations of the building for the second half of 2023. The primary goal is to measure details of those foundations which are largely not excavated yet. Meanwhile we observed over more than 6 months long-term and short-term variations of the muon rates since the start of the experiment, which seem to exhibit a correlation with the rain accumulating on the free field just above the gallery. We propose as an explanation for this behavior the retention of water by the soil above the detector site.

Keywords: muography, Archémuons, hydrology, precipitation, soil porosity

1. Introduction


Muon imaging or muography has emerged as a powerful non-invasive method to complement standard tools in Earth Sciences and is nowadays applied to a growing number of fields such as industrial controls, homeland security, civil engineering. This technique relies on the detection of modifications - absorption or scattering - in the atmospheric muon flux when these particles cross a target. Atmospheric muons are secondary products of primary cosmic-rays, essentially protons and helium nuclei expelled by stars, interacting with nuclei encountered on the top of the atmosphere.

The rather low interaction cross-section of muons with matter ensures that most of them reach the Earth's ground level and that furthermore they may significantly penetrate large and dense structures. As suggested originally by Alvarez in 1970 for the Chephren pyramid (Alvarez et al., 1970), this property may be exploited to perform density contrasts analysis of the interior of the target like X-rays do in medical imaging. As suggested by previous works in volcanology (Jourde et al., 2016), geology (Tramontini et al., 2019) or atmosphere surveys (Di Renzo et al., 2021), the permanence of the muons flux may find applications in monitoring the changes in the inner

Email addresses: avgitas@ip2i.in2p3.fr (T. Avgitas), ianigro@ip2i.in2p3.fr (J.-C. Ianigro),
marteau@ip2i.in2p3.fr (J. Marteau)

Preprint submitted to Arxiv

March 4, 2024




Constraints on anomalous Higgs boson couplings from its production and decay using the WW channel in proton-proton collisions at $\sqrt{s} = 13$ TeV

The CMS Collaboration*

Abstract

A study of the anomalous couplings of the Higgs boson to vector bosons, including CP -violation effects, has been conducted using its production and decay in the WW channel. This analysis is performed on proton-proton collision data collected with the CMS detector at the CERN LHC during 2016–2018 at a center-of-mass energy of 13 TeV, and corresponds to an integrated luminosity of 138 fb^{-1} . The different-flavor dilepton ($e\mu$) final state is analyzed, with dedicated categories targeting gluon fusion, electroweak vector boson fusion, and associated production with a W or Z boson. Kinematic information from associated jets is combined using matrix element techniques to increase the sensitivity to anomalous effects at the production vertex. A simultaneous measurement of four Higgs boson couplings to electroweak vector bosons is performed in the framework of a standard model effective field theory. All measurements are consistent with the expectations for the standard model Higgs boson and constraints are set on the fractional contribution of the anomalous couplings to the Higgs boson production cross section.

Submitted to the European Physical Journal C



Search for heavy neutral leptons in final states with electrons, muons, and hadronically decaying tau leptons in proton-proton collisions at $\sqrt{s} = 13$ TeV

The CMS Collaboration*

Abstract

A search for heavy neutral leptons (HNLs) of Majorana or Dirac type using proton-proton collision data at $\sqrt{s} = 13$ TeV is presented. The data were collected by the CMS experiment at the CERN LHC and correspond to an integrated luminosity of 138 fb^{-1} . Events with three charged leptons (electrons, muons, and hadronically decaying tau leptons) are selected, corresponding to HNL production in association with a charged lepton and decay of the HNL to two charged leptons and a standard model (SM) neutrino. The search is performed for HNL masses between 10 GeV and 1.5 TeV. No evidence for an HNL signal is observed in data. Upper limits at 95% confidence level are found for the squared coupling strength of the HNL to SM neutrinos, considering exclusive coupling of the HNL to a single SM neutrino generation, for both Majorana and Dirac HNLs. The limits exceed previously achieved experimental constraints for a wide range of HNL masses, and the limits on tau neutrino coupling scenarios with HNL masses above the W boson mass are presented for the first time.

Submitted to the Journal of High Energy Physics